




1. Position bag on the spare rear tyre and hold bag in position
2. Prepare **main straps** on back of tyre making sure they cross over underneath tyre mount (see image)
3. Buckle **main straps** loosely
4. Prepare **anti-slouch strap** by unbuckling and feeding under spare wheel mount, and return to the buckle at the top of the bag
5. Bag must be positioned so top lid is in line with top of tyre and position looks level
6. Firmly tension **anti-slouch strap**
7. Firmly tension both diagonal **main straps**
8. Once in correct position any excess strap to be re-fed into slide where possible to remove excess length
9. Attach security strap to good locking position and secure with padlock or other lock

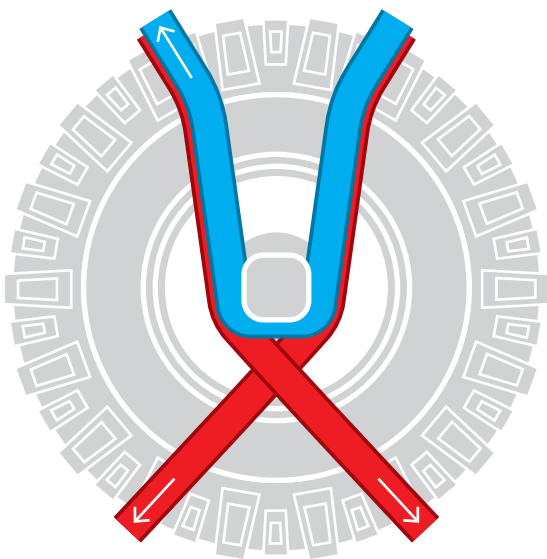

STRAP DIAGRAM

ANTI-SLOUCH STRAP



MAIN STRAPS

